





Floor Coverings—Tiles

Our woven vinyl products are a new innovation featuring outstanding performance and unlimited styling options. Our products can be used for both residential and commercial areas.

Our residential products ranges from floor covering, wall covering, carpet, door mat, placement, etc. While our commercial products can be used in kids area, hospitals, offices, hotels, exclusive boutiques and exhibition spaces.











Shapes of Tiles

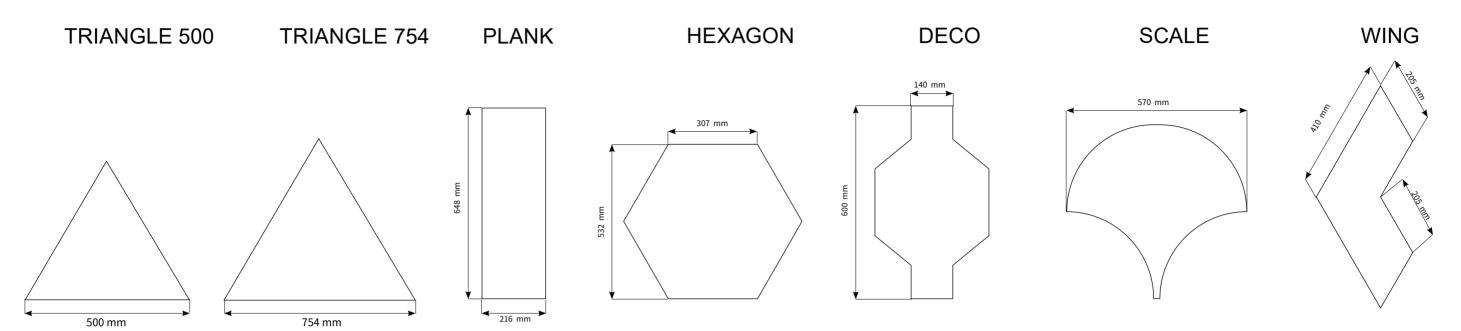

Eco Beauty is a creative and contemporary flooring concept based on seven different tile shapes. Your pattern design will vary in look depending on the choice of colour, the direction of the yarn and light reflections. Available in Delux, Fantasy, Classic and Elegant. For more information and inspiration visit www.ecofloorcovering.com

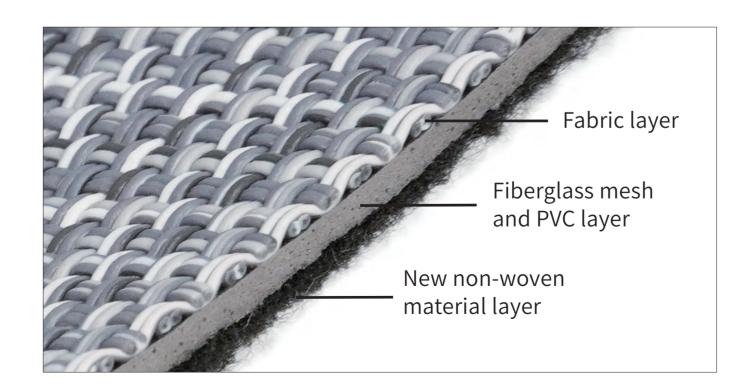

Special Backing for Tiles

We developed a new special backing for the tiles. The product structure is fabric layer, fiberglass mesh, PVC, and new non-woven material layer. This innovation can reduce noise, feel more comfortable underfoot, more importantly, the size is more stable than the ordinary PVC backing, and is not easy to shrink.

DELUX



JACQUARD



ECO-6017S-1

ECO-6021S



ECO-6040S



ECO-6042S



ECO-6041S

ECO-6038S

ELEGANT













ECO-51004BP

ECO-5100BP-1

ECO-51009BP

ECO-51012BP

ECO-51013BP













ECO-51023BP

ECO-52001BP

ECO-52008BP-1


ECO-51002BP

ECO-51004BP

ECO-52006BP







ECO-52028BP



ECO-52029BP



ECO-52032BP




ECO-52033BP



ECO-52038BP

CLASSIC

TECHNICAL INFORMATION		TILES WITH PVC BACKING	TILES WITH SPECIAL BACKING
Classification	EN 685	33	33
Weight	ISO 8543	3-3.5kg/m ²	3.2-3.7kg/m ²
Thickness	ISO 1765	2.5mm-2.8mm	3.5mm-4.5mm
Roll length	EN 426	-	-
Roll width	EN 426	-	-
Tile dimension	EN 994	50x50cm	50x50cm
Dimension stability	ISO 2551	< 0.25%	< 0.25%
Curvature	EN 434	< 2mm	< 2mm
Caster Chair	EN 985	Continous use	Continous use
Body voltage	ISO 1815	≤ 2.0KV	≤ 2.0KV
Thermal resistance	ISO 8302	Suitable for underfloor heating	Suitable for underfloor heating
Colour fastness to light	ISO 105-B02	> 6	> 6
Anti-slip property	EN13893	> 0.3	> 0.3
Reaction to fire	EN13501-1	Bfl-s1	Bfl-s1
Smoke density	ASTM E662	< 450	< 450
REACH test	1907/2006	NO.(6614)008-1228-R2	
CE certification ()	EN14041 EN15114	NO. EC.1282.OA140305.AYD0738	
ISO 9001 certification	ISO 9001:2008	NO. 04514Q20096R0S	
ISO14001 certification	ISO14001:2004	NO. 04514E20029R0S	







ECO-11027BS

ECO-11029BS







ECO-11033BS

ECO-11040BS

ECO-11042BS

Anji Yike Decoration Material Technology Co., Ltd.

Add: Bamboo industrial technology innovation park, Xiaofeng town, Anji, Zhejiang, China

Tel: 86-572-5705325 Fax: 86-572-5216088

Web: www.ecofloorcovering.com